


Main Technical Parameters

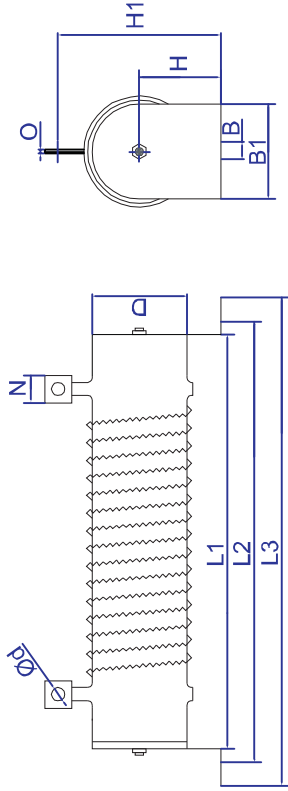

pic. M

Optional table for Wire Wound Braking Resistor (RXHG)

| Specifications | Power (w) | Pic.   | Dimentions |        |        |       |     |     |     |        |    |    |     | Wt.(kg) |
|----------------|-----------|--------|------------|--------|--------|-------|-----|-----|-----|--------|----|----|-----|---------|
|                |           |        | L1(±5)     | L2(±5) | L3(±5) | D(±2) | B   | B1  | H   | H1(±3) | N  | Φd | O   |         |
| RX20           | 400       | pic. M | 330        | 360    | 390    | 40    | 6.0 | 40  | 45  | 90     | 10 | 4  | 1.2 | 1       |
| RX20           | 500       |        | 330        | 360    | 400    | 50    | 6.0 | 50  | 46  | 100    | 10 | 4  | 1.2 | 1       |
| RX20           | 800       |        | 300        | 345    | 365    | 70    | 8.0 | 70  | 65  | 135    | 15 | 8  | 2   | 1.7     |
| RX20           | 1000      |        | 300        | 345    | 365    | 70    | 8.0 | 70  | 65  | 135    | 15 | 8  | 2   | 1.75    |
| RX20           | 1500      |        | 420        | 465    | 485    | 60    | 8.0 | 60  | 60  | 115    | 13 | 6  | 2   | 2.4     |
| RX20           | 2000      |        | 420        | 465    | 485    | 70    | 8.0 | 70  | 65  | 135    | 15 | 8  | 2   | 2.4     |
| RX20           | 2500      |        | 510        | 550    | 570    | 70    | 8.0 | 70  | 65  | 135    | 15 | 8  | 2   | 2.4     |
| RX20           | 3000      |        | 510        | 550    | 570    | 70    | 8.0 | 70  | 65  | 135    | 15 | 8  | 2   | 2.8     |
| RX20           | 3500      |        | 510        | 550    | 570    | 70    | 8.0 | 70  | 65  | 135    | 15 | 8  | 2   | 2.8     |
| RX20           | 4000      |        | 505        | 570    | 600    | 100   | 8.0 | 100 | 85  | 180    | 15 | 8  | 2   | 4.5     |
| RX20           | 5000      | pic. M | 505        | 570    | 600    | 100   | 8.0 | 100 | 85  | 180    | 15 | 8  | 2   | 4.5     |
| RX20           | 6000      |        | 505        | 570    | 600    | 100   | 8.0 | 100 | 85  | 180    | 15 | 8  | 2   | 4.5     |
| RX20           | 7000      |        | 700        | 745    | 790    | 100   | 8.0 | 100 | 85  | 180    | 15 | 8  | 2   | 6       |
| RX20           | 8000      |        | 700        | 745    | 790    | 100   | 8.0 | 100 | 85  | 180    | 15 | 8  | 2   | 6       |
| RX20           | 9000      |        | 720        | 755    | 795    | 150   | 8.0 | 150 | 100 | 245    | 18 | 8  | 2   | 6       |
| RX20           | 10000     |        | 720        | 755    | 795    | 150   | 8.0 | 150 | 100 | 245    | 18 | 8  | 2   | 16      |
| RX20           | 12000     |        | 720        | 755    | 795    | 150   | 8.0 | 150 | 100 | 245    | 18 | 8  | 2   | 16      |
| RX20           | 15000     |        | 720        | 755    | 195    | 150   | 8.0 | 150 | 100 | 245    | 18 | 8  | 2   | 17      |



Wire Wound Braking Resistor Cabinet


Specifications

Wire Wound Braking Resistor cabinet is putting certain resistors in the pre-designed cabinet, using parallel or series method to get required power and resistance. Box is adjusted by differents power and resistance, with fans and relevant electrical accessories.


Technique Specification

Custom as requested.

Main Technical Parameters



pic. N

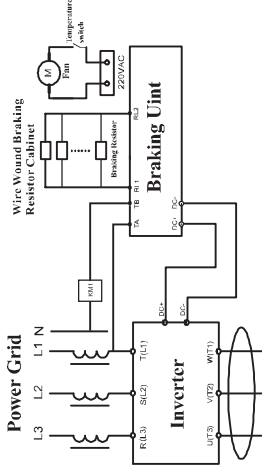

Optional table for Wire Wound Braking Resistor cabinet

| Specifications | Power (w) | Pic.   | Dimentions |     |      |    | Termnal |      | Wiring | Combinations | Temperature controlled switch | Cooling fan | Wt. |
|----------------|-----------|--------|------------|-----|------|----|---------|------|--------|--------------|-------------------------------|-------------|-----|
|                |           |        | W          | D   | H    | W1 | B1      | H    |        |              |                               |             |     |
| SKS            | 40kw      | pic. N | 690        | 690 | 930  | /  | M6      | 25   | H1(±3) | N            | Φd                            | O           | /   |
| SKS            | 50kw      |        | 690        | 690 | 1130 | /  | M6      | 25   | 8*5kw  | YES          | YES                           | /           | /   |
| SKS            | 60kw      |        | 690        | 690 | 1130 | /  | M6      | 35   | 10*5kw | YES          | YES                           | /           | /   |
| SKS            | 70kw      |        | 690        | 690 | 1330 | /  | M6      | 35   | 12*5kw | YES          | YES                           | /           | /   |
| SKS            | 80kw      |        | 690        | 690 | 1330 | /  | M6      | 50   | 14*5kw | YES          | YES                           | /           | /   |
| SKS            | 90kw      |        | 690        | 690 | 1530 | /  | M6      | 50   | 16*5kw | YES          | YES                           | /           | /   |
| SKS            | 100kw     |        | 690        | 690 | 1530 | /  | M6      | 50   | 18*5kw | YES          | YES                           | /           | /   |
| SKS            | 120kw     |        | 690        | 690 | 1530 | /  | M6      | 50   | 20*5kw | YES          | YES                           | /           | /   |
| SKS            | 140kw     |        | 1330       | 690 | 1330 | /  | M6      | 75   | 20*6kw | YES          | YES                           | /           | /   |
| SKS            | 160kw     |        | 1330       | 690 | 1330 | /  | M6      | 75   | 28*5kw | YES          | YES                           | /           | /   |
| SKS            | 180kw     | pic. N | 1330       | 690 | 1530 | /  | M6      | 75   | 32*5kw | YES          | YES                           | /           | /   |
| SKS            | 200kw     |        | 1330       | 690 | 1530 | /  | M6      | 75   | 36*5kw | YES          | YES                           | /           | /   |
| SKS            | 300kw     |        | 1970       | 690 | 1530 | /  | M6      | 2*75 | 40*5kw | YES          | YES                           | /           | /   |
| SKS            | 300kw     |        | 1970       | 690 | 1530 | /  | M6      | 2*75 | 60*5kw | YES          | YES                           | /           | /   |

Note: Can customized as request. And can installed together with braking unit.