


CẦU TRỤC DẪM ĐƠN KIỂU LD (1T-10T)

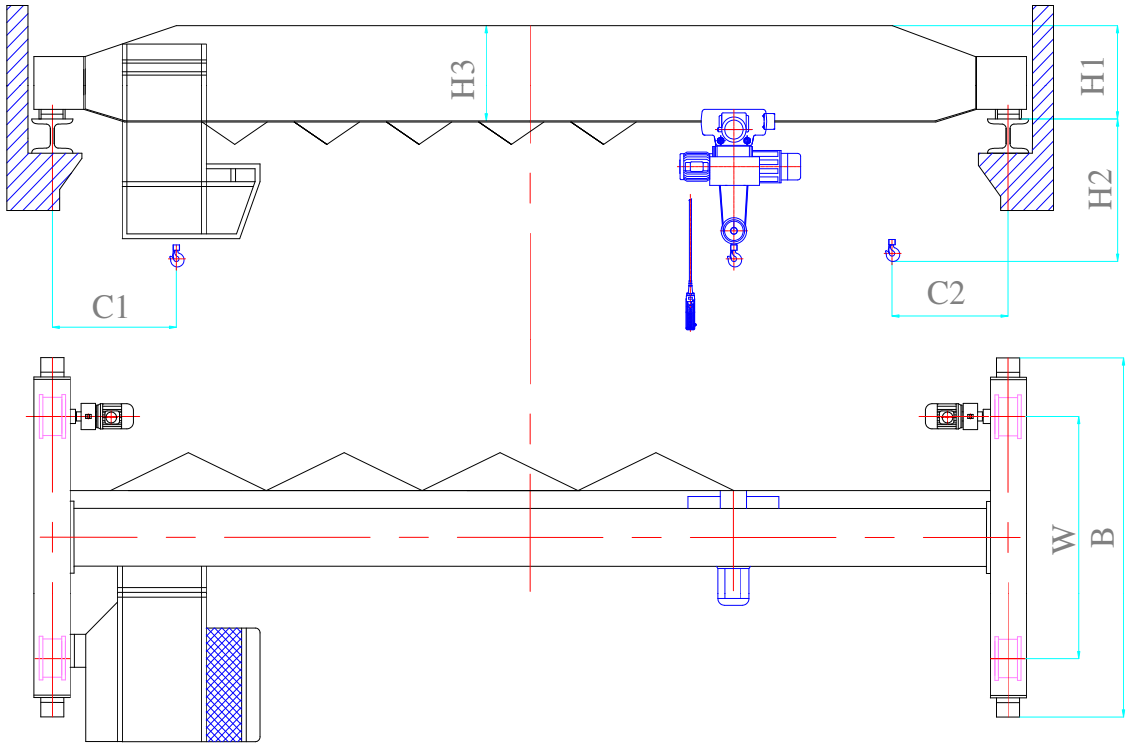

Tải trọng (T) Load capacity	Khẩu độ (m) Span	Tổng khối lượng	Lực nén lên bánh xe max (T)	Lực nén lên bánh xe min (T)	Kích thước cơ bản (Basic size)						
					H3	B	W	C2	C1	H2	H1
1	7.5	1.67/2.19	1.08/1.31	0.40/0.43	550	2500	2000	796	1274	810	490
	8	1.72/2.24	1.09/1.32	0.41/0.44							
	8.5	1.76/2.28	1.10/1.33	0.42/0.45							
	9	1.82/2.34	1.12/1.35	0.44/0.47							
	9.5	1.86/2.38	1.13/1.36	0.45/0.48							
	10	1.91/2.43	1.14/1.37	0.46/0.49							
	10.5	1.96/2.48	1.15/1.39	0.47/0.50							
	11	2.01/2.53	1.16/1.10	0.48/0.51							
	11.5	2.05/2.57	1.17/1.41	0.49/0.52							
	12	2.10/2.62	1.18/1.42	0.50/0.53							
	12.5	2.19/2.71	1.21/1.45	0.53/0.55	595	3000	2500				
	13	2.24/2.76	1.23/1.47	0.55/0.57							
	13.5	2.29/2.81	1.24/1.48	0.56/0.58							
	14	2.33/2.85	1.25/1.49	0.57/0.59							
	14.5	2.44/2.96	1.28/1.52	0.60/0.62							
	15	2.50/3.02	1.30/1.52	0.62/0.64							
	15.5	2.54/3.06	1.31/1.55	0.63/0.65							
	16	2.59/3.11	1.32/1.56	0.64/0.66							
	16.5	2.64/3.16	1.33/1.58	0.65/0.67							
	17	2.70/3.22	1.35/1.60	0.67/0.69							
19.5	3.11/3.63	1.44/1.69	0.76/0.77	650	3500	3000	870	530			
22.5	3.54/4.05	1.54/1.79	0.86/0.87	700				580			
	7.5	1.81/2.33	1.64/1.87	0.40/0.44							

2	8	1.86/2.38	1.65/1.88	0.41/0.45	550	2500	2000	871.5	1292.5	1000	490			
	8.5	1.90/2.42	1.66/1.89	0.42/0.46										
	9	1.90/2.48	1.68/1.91	0.44/0.47										
	9.5	2.00/2.52	1.69/1.92	0.45/0.48										
	10	2.05/2.57	1.70/1.93	0.46/0.49										
	10.5	2.10/2.62	1.71/1.95	0.47/0.50										
	11	2.15/2.67	1.72/1.96	0.48/0.51	595	3000	2500	870	1290	1050	580			
	11.5	2.24/2.76	1.75/1.99	0.51/0.53										
	12	2.29/2.81	1.76/2.00	0.52/0.54										
	12.5	2.38/2.90	1.79/2.03	0.55/0.57										
	13	2.44/2.96	1.81/2.05	0.57/0.59										
	13.5	2.49/3.01	1.82/2.06	0.58/0.60										
	14	2.53/3.05	1.83/2.07	0.59/0.61	700	3500	3000	870	1290	1060	600			
	14.5	2.74/3.26	1.87/2.11	0.63/0.65										
	15	2.80/3.32	1.88/2.12	0.64/0.66										
	15.5	2.85/3.37	1.89/2.13	0.65/0.67										
	16	2.91/3.43	1.91/2.15	0.67/0.69										
	16.5	2.96/3.48	1.92/2.17	0.68/0.70										
	17	3.02/3.54	1.93/2.18	0.69/0.71	800	900	1080	1120	785					
19.5	3.99/4.51	2.18/2.43	0.94/0.95											
22.5	4.79/5.31	2.38/2.63	1.14/1.15	900										
Tải trọng (T) Load capacity	Khẩu độ (m) Span	Tổng khối lượng	Lực nén lên bánh xe max (T)	Lực nén lên bánh xe min (T)	Kích thước cơ bản (Basic size)									
					H3	B	W	C2	C1	H2	H1			
3	7.5	1.88/2.40	2.15/2.38	0.41/0.44	650	2500	2000	820	1290	1150	530			
	8	2.01/2.53	2.16/2.39	0.42/0.45										
	8.5	2.06/2.58	2.18/2.41	0.44/0.47										
	9	2.12/2.64	2.19/2.42	0.45/0.48										
	9.5	2.17/2.69	2.20/2.43	0.46/0.49										
	10	2.22/2.74	2.22/2.45	0.48/0.50										
	10.5	2.28/2.80	2.23/2.47	0.49/0.51	700	3000	2500	820	1290	560				
	11	2.34/2.86	2.24/2.48	0.50/0.52										
	11.5	2.50/3.08	2.25/2.49	0.52/0.54										
	12	2.56/3.08	2.28/2.52	0.54/0.55										
	12.5	2.62/3.14	2.31/2.55	0.57/0.59										
	13	2.73/3.25	2.32/2.56	0.58/0.60										
	13.5	2.79/3.31	2.34/2.58	0.60/0.62	800						3500	3000	1170	660
	14	2.85/3.37	2.35/2.59	0.61/0.63										
	14.5	3.39/3.91	2.48/2.72	0.74/0.76										
	15	3.48/4.00	2.50/2.74	0.76/0.78										
	15.5	3.55/4.07	2.52/2.76	0.78/0.80										
	16	3.62/4.14	2.54/2.78	0.80/0.82										
	16.5	3.70/4.22	2.55/2.8	0.81/0.83	900						1210	820		
	17	3.79/4.31	2.57/2.82	0.83/0.85										
	19.5	4.43/4.95	2.80/3.05	1.06/1.07										
	22.5	5.41/5.93	2.94/3.19	1.20/1.21	1000									
	7.5	2.47/2.98	3.28/3.51	0.42/0.46										

5	8	2.55/3.06	3.29/3.52	0.43/0.47	720	2500	2000	840	1300	1380	580
	8.5	2.62/3.13	3.30/3.53	0.44/0.48							
	9	2.68/3.19	3.32/3.55	0.46/0.49							
	9.5	2.75/3.26	3.33/3.56	0.47/0.50							
	10	2.83/3.34	3.35/3.58	0.49/0.52							
	10.5	2.90/3.41	3.36/3.60	0.50/0.53							
	11	2.95/3.47	3.37/3.61	0.51/0.54	800	3000	2500			1400	660
	11.5	3.13/3.65	3.48/3.72	0.62/0.64							
	12	3.20/3.72	3.50/3.74	0.64/0.66							
	12.5	3.31/3.83	3.53/3.77	0.67/0.69							
	13	3.40/3.92	3.55/3.79	0.69/0.71							
	13.5	3.47/3.99	3.57/3.81	0.71/0.73							
	14	3.55/4.07	3.59/3.83	0.73/0.75	900	3500	3000			1415	785
	14.5	3.84/4.36	3.68/3.92	0.82/0.84							
	15	3.94/4.46	3.70/3.94	0.84/0.86							
	15.5	4.02/4.54	3.72/3.96	0.86/0.88							
	16	4.11/4.63	3.74/3.98	0.88/0.90							
	16.5	4.19/4.71	3.76/4.01	0.90/0.92							
	17	4.28/4.80	3.78/4.03	0.92/0.94	1000	1400	820				
	19.5	5.08/5.60	4.06/4.31	1.20/1.21							
	22.5	6.28/6.80	4.36/4.61	1.50/1.51	1100	1485	875				
Tải trọng (T) Load capacity	Khẩu độ (m) Span	Tổng khối lượng	Lực nén lên bánh xe max (T)	Lực nén lên bánh xe min (T)	Kích thước cơ bản (Basic size)						
					H3	B	W	C2	C1	H2	H1
5	7.5	2.47/2.98	3.28/3.51	0.42/0.46	720	2500	2000	840	1300	1380	580
	8	2.55/3.06	3.29/3.52	0.43/0.47							
	8.5	2.62/3.13	3.30/3.53	0.44/0.48							
	9	2.68/3.19	3.32/3.55	0.46/0.49							
	9.5	2.75/3.26	3.33/3.56	0.47/0.50							
	10	2.83/3.34	3.35/3.58	0.49/0.52							
	10.5	2.90/3.41	3.36/3.60	0.50/0.53	800	3500	2000			1400	660
	11	2.95/3.47	3.37/3.61	0.51/0.54							
	11.5	3.13/3.65	3.48/3.72	0.62/0.64							
	12	3.20/3.72	3.50/3.74	0.64/0.66							
	12.5	3.31/3.83	3.53/3.77	0.67/0.69							
	13	3.40/3.92	3.55/3.79	0.69/0.71							
	13.5	3.47/3.99	3.57/3.81	0.71/0.73	900	2500	3000			1415	785
	14	3.55/4.07	3.59/3.83	0.73/0.75							
	14.5	3.84/4.36	3.68/3.92	0.82/0.84							
	15	3.94/4.46	3.70/3.94	0.84/0.86							
	15.5	4.02/4.54	3.72/3.96	0.86/0.88							
	16	4.11/4.63	3.74/3.98	0.88/0.90							
	16.5	4.19/4.71	3.76/4.01	0.90/0.92	1000	1400	820				
	17	4.28/4.80	3.78/4.03	0.92/0.94							
	19.5	5.08/5.60	4.06/4.31	1.20/1.21							
	22.5	6.28/6.80	4.36/4.61	1.50/1.51							
	7.5	3.39/3.91	5.49/5.72	0.44/0.48							

10	8	3.48/4.00	5.51/5.74	0.46/0.49	900	2500	2000	1230	1830	1470	745
	8.5	3.57/4.09	5.53/5.76	0.48/0.51							
	9	3.69/4.21	5.56/5.79	0.51/0.54							
	9.5	3.77/4.29	5.58/5.81	0.53/0.56							
	10	3.87/4.39	5.60/5.83	0.55/0.58							
	10.5	3.99/4.51	5.62/5.86	0.57/0.60							
	11	4.08/4.59	5.65/5.89	0.60/0.62	1000	3000	2500			1495	820
	11.5	4.36/4.88	5.71/5.95	0.66/0.68							
	12	4.46/4.98	5.73/5.97	0.68/0.70							
	12.5	4.64/5.13	5.76/6.00	0.70/0.72						1540	855
	13	4.71/5.22	5.78/6.02	0.73/0.75							
	13.5	4.83/5.35	5.81/6.05	0.76/0.78							
	14	4.93/5.45	5.83/6.07	0.78/0.80	1100	3500	3000				
	14.5	5.10/5.62	5.92/6.16	0.87/0.89							
	15	5.20/5.72	5.95/6.19	0.90/0.92							
	15.5	5.33/5.85	5.98/6.22	0.93/0.95							
	16	5.43/5.95	6.00/6.24	0.95/0.97							
	16.5	5.53/6.05	6.03/6.28	0.98/1.00							
	17	5.62/6.14	6.05/6.30	1.00/1.02	1150	3500	3000			1600	865
	19.5	6.69/7.21	6.32/6.57	1.27/1.28							
	22.5	7.76/8.28	6.60/6.85	1.55/1.56							