


ELECTRIC WINCH



1000kg~10000kg

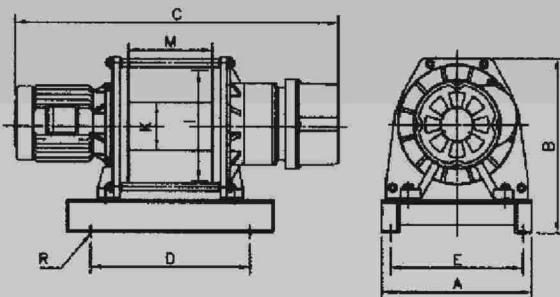

DIMENSIONS MM

Model	Mounting bolt pattern			D	E	I	M	K	R
	A	B	C						
GG-1000	410	540	990	500	370	320	230	127	4-φ 19
GG-1100	470	570	1080	620	425	320	315	140	4-φ 19
GG-2000	565	650	1218	600	499	410	405	178	4-φ 22
GG-3000	565	650	1400	650	499	410	405	178	8-φ 30
GG-5000	740	830	1900	920	680	560	650	273	8-φ 32
GG-10000	1100	1255	2350	1600	1000	800	1000	360	8-φ 38

SPECIFICATIONS

Model	Lifting capacity top layer kg	Lifting speed m/min	Motor kw×poles	Lifting height m	Wire rope φ mm×m	Net weight kg	Gross weight kg
GG-1000	1000	15-20	5.5×4	58	10×60	210	240
GG-1100	1000	15-20	5.5×4	97	10×100	260	300
GG-2000	2000	15-20	7.5×4	97	14×100	310	350
GG-3000	3000	15-20	10×4	97	16×100	410	450
GG-5000	5000	10-15	20×4	190	22.4×200	950	1100
GG-10000	10000	9-13	30×6	196	32×200	2800	2900

**GG-1000. GG-1100. GG-2000.
GG-3000. GG-5000. GG-10000
220V-380V-440V×3ph AC**

FEATURES:

- Heavy duty high efficiency ball bearings on all running surfaces
- Planetary gearing for maximum efficiency
- Cast steel foot mounting
- Fabricated steel drum
- Electromagnetic spring-applied fail safe brake
- Supplied on steel base plate ready to mount
- Enclosed drum flange to prevents ropes becoming trapped between drum and support castings quietrunning

WARNING:

Winches are not to be used for the moving of persons

WARRANTY:

Each new winch is guaranteed against defects in workmanship and material defects for a period of twelve months from date of purchase.

Wire ropes are not included under warranty.

STANDARD ACCESSORIES:

Wire rope w/safety hook
Switch cord 1.25mm²×3C×10m
Power lead 14mm²×4C×1m
Pendant switch K-61
Base plate

OPTIN ACCESSORIES:

Remote control K-82A assembly